




Caños acanalados

Los caños acanalados se fabrican de plástico fluorocarbúrico Φ -4 (PTFE).

A. Caños acanalados. DN de 15 a 150 mm. Largo de 0,2 a 3 m. Espesor de pared 1,5-2.2 mm.

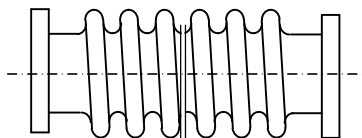


B. Caños acanalados armados de malla de acero 304. DN de 25 a 200 mm. Largo de 0,2 a 3 m. Una brida – libre

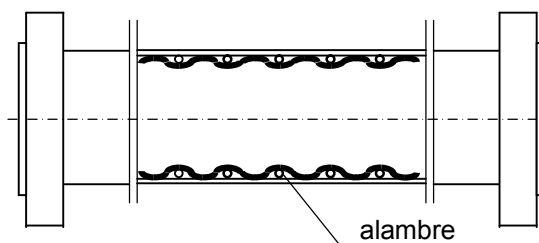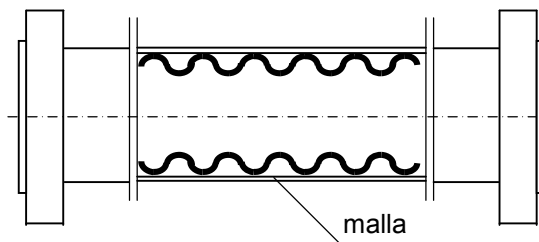

DN), mm		15	20	25	32	40	50	65	80	100	125	150	200	
Espesor de pared (2, 3), mm		1,5			1,6	2,0				2,1	2,5	2,6	3,0	
Largo de terminal),mm		~40			~50			~60	~70		~80	~130		
Presión, MPa	A	0,6			0,5			0,3	0,2		0,08	0,07	0,07	
	B	1,6								1,2	1,0		0,8	
	C	2,0								1,5		1,2	1,0	
Radio mínimo del doblado, DN	A	≥ 5,0			≥ 4,5		≥ 4.0		≥ 3.0			5		
	B	5											6	
	C	5											6	
Temperatura de trabajo, °C	A	-10 – +150											0 – +80	
	B	-10 – +180				-10 – +160				-5 – +150			0 – +80	
	C	-5 – +180				-5 – +170				-5 – +150			0 – +80	

Faroles de revisión

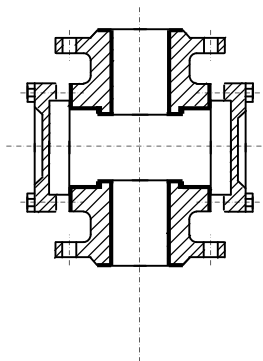

Modelo	Diámetro nominal	Dimensiones exteriores		Vidrio	
		H	L	diámetro	espesor
CΦ-2-25	DN25	160	90	70	15
CΦ-2-32	DN32	180	90	70	15
CΦ-2-40	DN40	200	110	80	15
CΦ-2-50	DN50	230	130	110	15
CΦ-2-65	DN65	290	170	140	20
CΦ-2-80	DN80	310	190	160	20
CΦ-2-100	DN100	350	234	180	20

Dimensiones de unión de las bridas según GOST 12815-80.