



Corrugated hoses

Corrugated hoses are made of fluoroplastic Ф-4 (PTFE).


A. Corrugated hoses. DN from 15 to 150 mm. Length is from 0.2 to 3 m. Wall thickness is 1.5 – 2.2 mm.

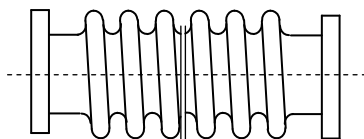

Б. Corrugated hoses reinforced with steel grid 304. DN from 25 to 200 mm. Length from 0.2 to 3 m. One flange is free

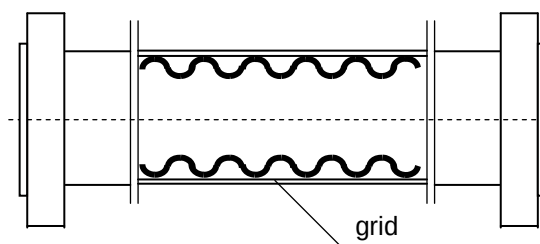


В. Corrugated hoses reinforced with steel grid 304. DN from 25 to 200 mm. Length from 0.2 to 3 m. One flange is free

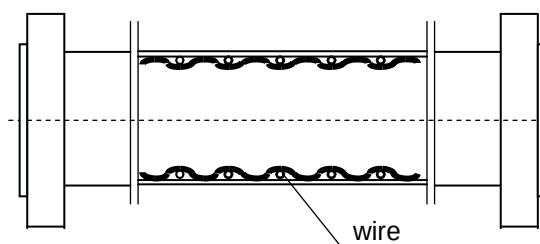

DN),		15	20	25	32	40	50	65	80	100	125	150	200
Wall thickness (2, 3), mm		1,5			1,6	2,0				2,1	2,5	2,6	3,0
Terminator length, mm		~40			~50			~60	~70		~80	~130	
Pressure, MPa	A	0,6			0,5			0,3	0,2		0,08	0,07	0,07
	B	1,6								1,2	1,0		0,8
	C	2,0								1,5		1,2	1,0
Minimum bending radius, DN	A	≥ 5,0			≥ 4,5		≥ 4.0		≥ 3.0			5	
	B	5											6
	C	5											6
Working temperature, °C	A	-10 – +150											0 – +80
	B	-10 – +180				-10 – +160				-5 – +150		0 – +80	
	C	-5 – +180				-5 – +170				-5 – +150		0 – +80	

Run-down boxes

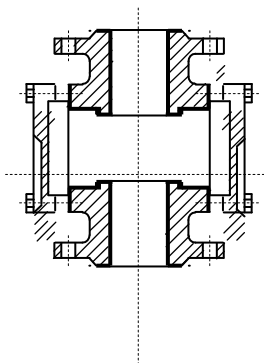

Model	DN	Overall dimensions		Glass	
		H	L	diameter	thickness
SF-2-25	DN25	160	90	70	15
SF-2-32	DN32	180	90	70	15
SF-2-40	DN40	200	110	80	15
SF-2-50	DN50	230	130	110	15
SF-2-65	DN65	290	170	140	20
SF-2-80	DN80	310	190	160	20
SF-2-100	DN100	350	234	180	20

Connecting dimensions of flanges according to ГОСТ 12815-80.